


Lecture (08)


STP - CDP

Dr. Ahmed M. ElShafee

- Such design creates a single point of failure. We could easily tweak this simple design to make it more resilient by adding an extra path between SW2 and SW3

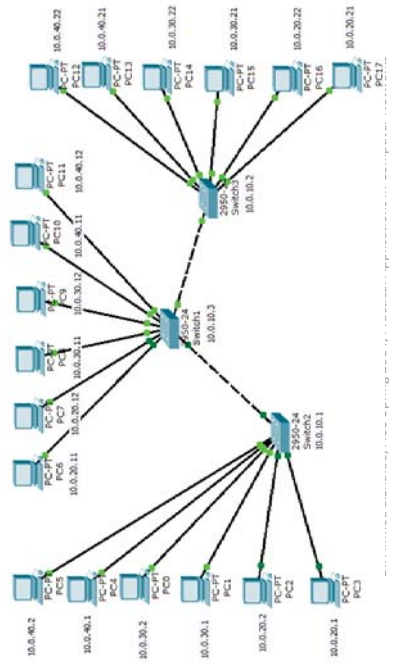

- STP
- CDP

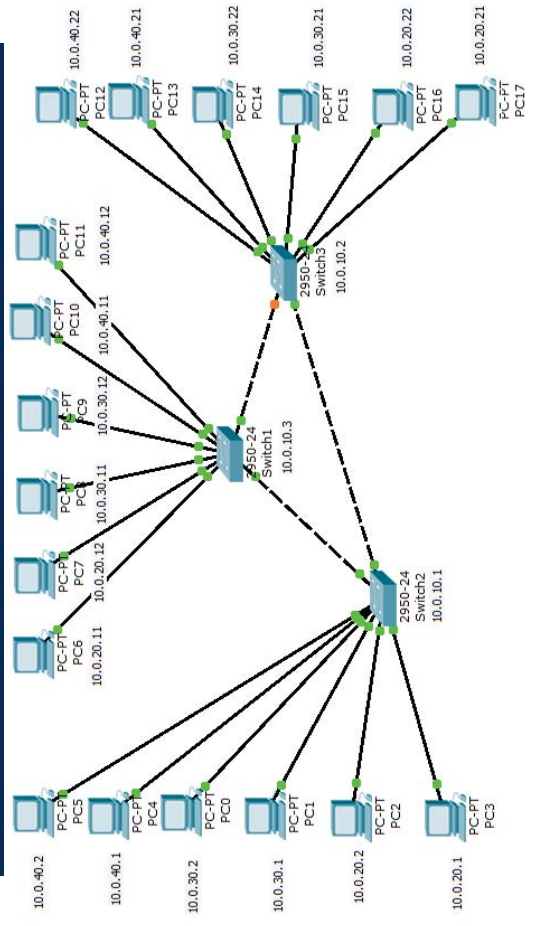

```

SW2
+++
enable
config t
interface fa0/22
switchport mode trunk
end
copy running-config startup-config

SW03
++++
enable
config t
interface fa0/22
switchport mode trunk
end
copy running-config startup-config

```

Dr. Ahmed ElShafee, ACU Spring 2014, Practical Applications in Computer Networks

- The redundant connection between **SW2** and **SW3** creates a loop.
- The loop in turn, will create three serious problems.
 - **Duplicate Frame Delivery**
 - **MAC Address Table Instability**
 - **Broadcast Storm**
- The last one in the list will eventually render our system unavailable.

1

Dr. Ahmed ElShafee, ACU Spring 2014, Practical Applications in Computer Networks

STP

- Spanning-Tree Protocol (turned on by default), which will dynamically block redundant connections creating a loop free topology.
- Should the primary link fail, the one that is in the blocking state will start forwarding the traffic in about 30 seconds by default

2

Dr. Ahmed ElShafee, ACU Spring 2014, Practical Applications in Computer Networks

Spanning-Tree Protocol Overview

STP is a layer 2 loop prevention mechanism.


- Switches running this protocol use special frames called **Bridge Protocol Data Unit (BPDU)**.
- STP let switches create a loop free topology. This is accomplished using three distinct phases:
 1. Select a **single switch** to be the **root bridge** machine which is the central device in the layer 2 network.
 - This machine will have all its ports in the forwarding state (**designated port** role).
- 2. All other switches (non-root switches), will select a **single path** towards the root bridge.

3


Dr. Ahmed ElShafee, ACU Spring 2014, Practical Applications in Computer Networks

- That port is called the 'root port' and will be forwarding traffic that is destined out of the switch through the root bridge.
 - This path is the least cost (best) path towards the root.
3. All other switches will select a **single path per segment** in order to block stop the loop.
- The port that is forwarding traffic is called **designated port**.
 - The port that is blocking traffic to stop the loop is called **non-designated port**.

Dr. Ahmed ElShafee, ACU Spring 2014, Practical Applications in Computer Networks

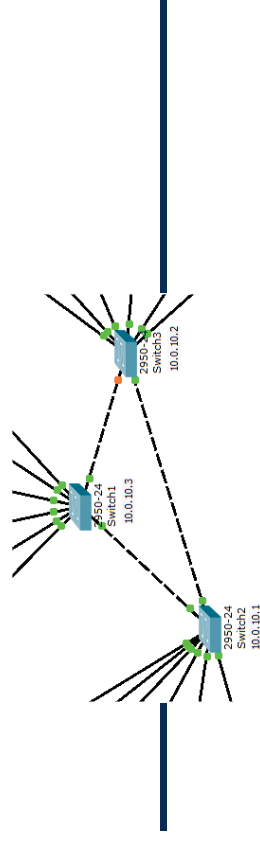

- administrator should configure the root bridge.
- Typically, the most powerful switch in the center of the network plays that role.
- You do not want some access switch to be transmitting the frames between other switches.
- Access switches are designed to connect your computers to the network, and not to handle the majority of the traffic between the switches which root bridge must deal with.
- If you do not configure root bridge yourself, the switch with the lowest MAC address becomes the root since the priority is identical on all of them by default.

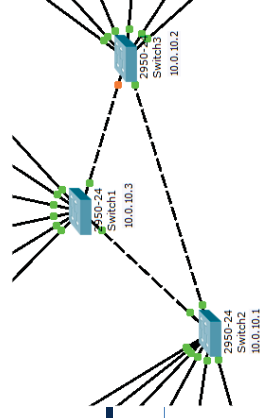


Discovering root switch

```
SW01#show spanning-tree vlan 1
VLAN0001
Spanning tree enabled protocol ieee
Root ID Priority 32769
Address 000D.BD98.4239
This bridge is the root
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
```

```
Bridge ID Priority 32769 (priority 32768 sys-id-ext 1)
Address 000D.BD98.4239
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
Aging Time 20
```

Interface	Role	Sts	Cost	Prio.	Nbr	Type
Fa0/22	Desg	FWD	19	128.22	P2p	
Fa0/24	Desg	FWD	19	128.24	P2p	

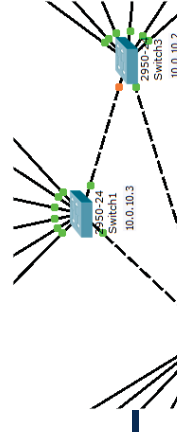


SW02#show spanning-tree vlan 1

```
VLAN0001
Spanning tree enabled protocol ieee
Root ID Priority 32769
Address 000D.BD98.4239
Cost 19
Port 24(FastEthernet0/24)
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
```

```
Bridge ID Priority 32769 (priority 32768 sys-id-ext 1)
Address 00D0.9721.49E8
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
Aging Time 20
```

Interface	Role	Sts	Cost	Prio.	Nbr	Type
Fa0/23	Desg	FWD	19	128.23	P2p	
Fa0/24	Root	FWD	19	128.24	P2p	

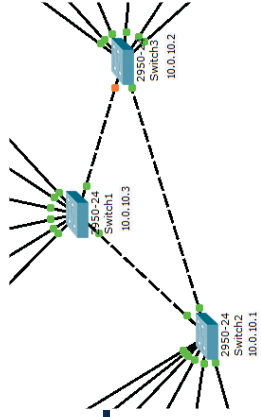

SW03#show spanning-tree vlan 1

VLAN0001

Spanning tree enabled protocol ieee

Root ID Priority 32769

Address 000D.BD98.4239

Cost 19

Port 22(FastEthernet0/22)

Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Bridge ID Priority 32769 (priority 32768 sys-id-ext 1)

Address 00E0.A303.8D77

Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Aging Time 20

Interface Role Sts Cost Prio.Nbr Type

Fa0/22 Root FWD 19 128.22 P2p

Fa0/23 Altn BLK 19 128.23 P2p

FL01-R03-SW03#show vlan

VLAN Name	Status	Ports
1 default	active	Fa0/16, Fa0/17, Fa0/18, Fa0/19 Fa0/20, Fa0/21, Fa0/24
2 Finance	active	Fa0/1, Fa0/2, Fa0/3, Fa0/4 Fa0/5
3 HR	active	Fa0/6, Fa0/7, Fa0/8, Fa0/9 Fa0/10
4 Administration	active	Fa0/11, Fa0/12, Fa0/13, Fa0/14 Fa0/15


FL01-R03-SW03(config)#spanning-tree vlan 1,2,3,4 priority 0

FL01-R03-SW03(config)#end

FL01-R03-SW03#copy running-config startup-config

Setting root switch, Method 1

- decrement the priority on **SW1** and leave the default value on the other switches, The lowest priority value allowed is zero and if higher needs to be used, it must be an increment of 4096.

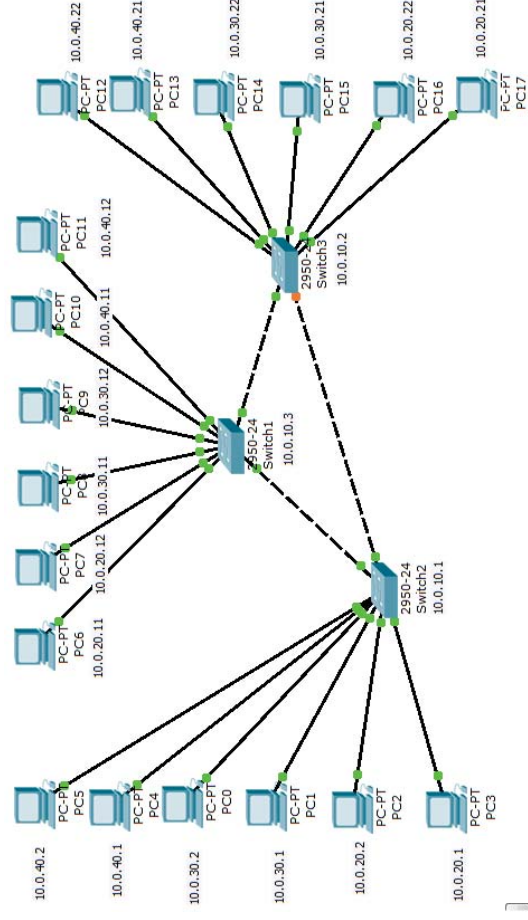

FL01-R02-SW02#show spanning-tree vian 1

```
VLAN0001
Spanning tree enabled protocol ieee
Root ID Priority 1
   Address 00D0.9721.49E8
   This bridge is the root
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Bridge ID Priority 1 (priority 0 sys-id-ext 1)
   Address 00D0.9721.49E8
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
Aging Time 20
```

Interface	Role	Sts	Cost	Prio.	Nbr	Type
Fa0/23	Desg	FWD	19	128.23		P2p
Fa0/24	Desg	FWD	19	128.24		P2p

1.V

Dr. Ahmed ElShafee, ACU Spring 2014, Practical Applications in Computer Networks

sw01#show spanning-tree vian 1

```
VLAN0001
Spanning tree enabled protocol ieee
Root ID Priority 24577
   Address 00D0.9721.49E8
   This bridge is the root
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Bridge ID Priority 24577 (priority 24576 sys-id-ext 1)
   Address 00D0.9721.49E8
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
Aging Time 20
```

Interface	Role	Sts	Cost	Prio.	Nbr	Type
Fa0/23	Desg	FWD	19	128.23		P2p
Fa0/24	Desg	FWD	19	128.24		P2p

1.V

Dr. Ahmed ElShafee, ACU Spring 2014, Practical Applications in Computer Networks

Setting root switch, Method 2

- Use spanning-tree vlan root primary macro command which decrements the priority value using Cisco best practices.


FL01-R03-SW03#show vlan

VLAN Name	Status	Ports
1 default	active	Fa0/16, Fa0/17, Fa0/18, Fa0/19 Fa0/20, Fa0/21, Fa0/24
2 Finance	active	Fa0/1, Fa0/2, Fa0/3, Fa0/4 Fa0/5
3 HR	active	Fa0/6, Fa0/7, Fa0/8, Fa0/9 Fa0/10
4 Administration	active	Fa0/11, Fa0/12, Fa0/13, Fa0/14 Fa0/15

```
FL01-R03-SW03(config)#spanning-tree vian 1,2,3,4 root primary
FL01-R03-SW03(config)#end
FL01-R03-SW03#copy running-config startup-config
```

Changing root ports

- Firstly lets add redundant connection between SW 1,2
- Collect spanning-tree information on vlan 1 of both SW01, SW02

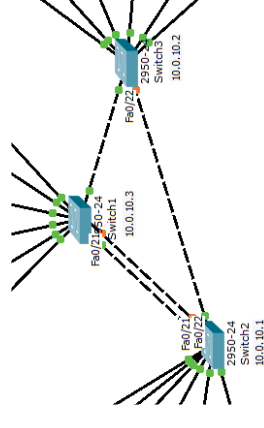

1.V


Dr. Ahmed ElShafee, ACU Spring 2014, Practical Applications in Computer Networks

```

SW01
++++
enable
config t
interface fa0/21
switchport mode trunk
end
copy running-config startup-config

SW02
++++
enable
config t
interface fa0/21
switchport mode trunk
end
copy running-config startup-config

```

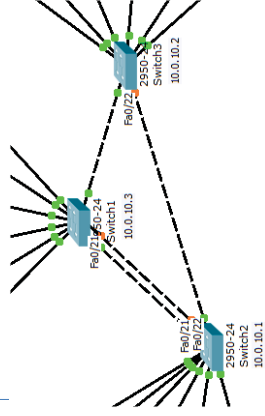


Dr. Ahmed ElShafee, ACU Spring 2014, Practical Applications in Computer Networks

```

SW02#show spanning-tree vlan 1
VLAN0001
Spanning tree enabled protocol ieee
Root ID Priority 24577
Address 00D0.9721.49E8
Cost 19
Port 21(FastEthernet0/21)
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Bridge ID Priority 32769 (priority 32768 sys-id-ext 1)
Address 000D.BD98.4239
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
Aging Time 20

```

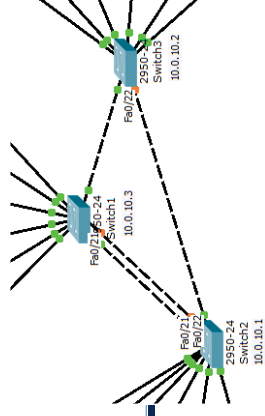

```

Interface Role Sts Cost Prio.Nbr Type
-----
Fa0/21 Root FWD 19 128.21 P2p
Fa0/22 Desg FWD 19 128.22 P2p
Fa0/24 Altn BLK 19 128.24 P2p

```

```

sw01#show spanning-tree vlan 1
VLAN0001

```

```

Spanning tree enabled protocol ieee
Root ID Priority 24577
Address 00D0.9721.49E8
This bridge is the root
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

```

```


Bridge ID Priority 24577 (priority 24576 sys-id-ext 1)
Address 00D0.9721.49E8
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
Aging Time 20

```

```

Interface Role Sts Cost Prio.Nbr Type
-----
Fa0/21 Desg FWD 19 128.21 P2p
Fa0/23 Desg FWD 19 128.23 P2p
Fa0/24 Desg FWD 19 128.24 P2p

```

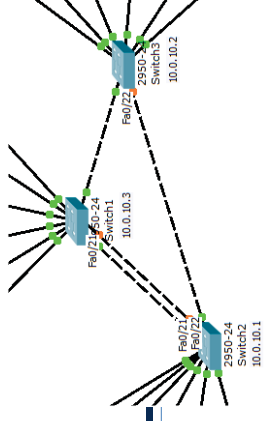

Swap alternative and root ports in SW02 (24, 21)

- @ root switch (SW1) decrease priority of alternative port (24) to 64

```

en
config t
interface fa0/24
spanning-tree vlan 1 port-priority 64
end
copy running-config startup-config

```

Y 1

SW02#show spanning-tree vlan 1

```
VLAN0001
Spanning tree enabled protocol ieee
Root ID Priority 24577
Address 00D0.9721.49E8
Cost 19
Port 24(FastEthernet0/24)
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
```

```
Bridge ID Priority 32769 (priority 32768 sys-id-ext 1)
Address 000D.BD98.4239
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
Aging Time 20
```

```
Interface Role Sts Cost Prio.Nbr Type
-----
Fa0/21 Altn BLK 19 128.21 P2p
Fa0/22 Desg FWD 19 128.22 P2p
Fa0/24 Root FWD 19 128.24 P2p
```

1* Dr. Ahmed ElShafee, ACU Spring 2014, Practical Applications in Computer Networks

Load balancing between redundant ports

- @ root switch (SW01), Check spanning tree on shared ports

```
sw01#show spanning-tree interface FastEthernet 0/21
Vlan Role Sts Cost Prio.Nbr Type
-----
VLAN0001 Desg FWD 19 128.21 P2p
VLAN0002 Desg FWD 19 128.21 P2p
VLAN0003 Desg FWD 19 128.21 P2p
VLAN0004 Desg FWD 19 128.21 P2p
```

```
sw01#show spanning-tree interface FastEthernet 0/24
Vlan Role Sts Cost Prio.Nbr Type
-----
VLAN0001 Desg FWD 19 128.24 P2p
VLAN0002 Desg FWD 19 128.24 P2p
VLAN0003 Desg FWD 19 128.24 P2p
VLAN0004 Desg FWD 19 128.24 P2p
```

1* Dr. Ahmed ElShafee, ACU Spring 2014, Practical Applications in Computer Networks

- @ SW02, Check spanning tree on shared ports

```
SW02>en
SW02#show spanning-tree interface FastEthernet 0/21
Vlan Role Sts Cost Prio.Nbr Type
-----
VLAN0001 Root FWD 19 128.21 P2p
VLAN0002 Root FWD 19 128.21 P2p
VLAN0003 Root FWD 19 128.21 P2p
VLAN0004 Root FWD 19 128.21 P2p
```

```
SW02#show spanning-tree interface fa0/24
Vlan Role Sts Cost Prio.Nbr Type
-----
VLAN0001 Altn BLK 19 128.24 P2p
VLAN0002 Altn BLK 19 128.24 P2p
VLAN0003 Altn BLK 19 128.24 P2p
VLAN0004 Altn BLK 19 128.24 P2p
```


1* Dr. Ahmed ElShafee, ACU Spring 2014, Practical Applications in Computer Networks

- @ root switch (SW01) decrease vlan3,4 priorities

```
interface FastEthernet 0/24
spanning-tree vlan 3 port-priority 64
spanning-tree vlan 4 port-priority 64
```

- Check spanning tree on SW02 shared ports

```
SW02#show spanning-tree interface FastEthernet 0/21
Vlan Role Sts Cost Prio.Nbr Type
-----
VLAN0001 Root FWD 19 128.21 P2p
VLAN0002 Root FWD 19 128.21 P2p
VLAN0003 Altn BLK 19 128.21 P2p
VLAN0004 Altn BLK 19 128.21 P2p
```



1* Dr. Ahmed ElShafee, ACU Spring 2014, Practical Applications in Computer Networks

CDP (CSICO Discovery Protocol)


- Every Cisco device using this protocol, reports information about itself by advertising special packets out of its all active interfaces. The important pieces of information it advertise include its:
 - Hostname
 - Platform
 - Ports where CDP packets are advertised
 - IOS version
 - IP address
- CDP can help administrator discover Cisco devices connected and create a topology diagram

T1

Dr. Ahmed ElShafee, ACU Spring 2014, Practical Applications in Computer Networks

```
SW02#show spanning-tree interface FastEthernet 0/24
```

Vlan	Role	Sts	Cost	Prio.	Nbr	Type
VLAN0001	Altn	BLK	19	128.24	P2p	
VLAN0002	Altn	BLK	19	128.24	P2p	
VLAN0003	Root	FWD	19	128.24	P2p	
VLAN0004	Root	FWD	19	128.24	P2p	

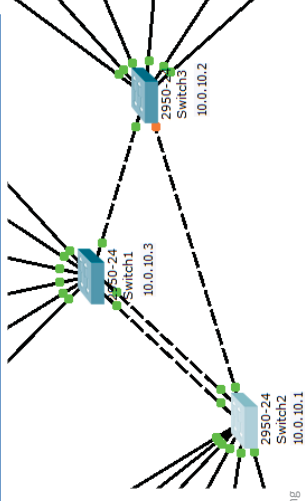

T1

Dr. Ahmed ElShafee, ACU Spring

SW02#show CDP

```
Global CDP information:
Sending CDP packets every 60 seconds
Sending a holdtime value of 180 seconds
Sending CDPv2 advertisements is enabled
```

SW02#show CDP interface

```
FastEthernet0/1 is up, line protocol is up
Sending CDP packets every 60 seconds
Holdtime is 180 seconds
FastEthernet0/2 is up, line protocol is up
Sending CDP packets every 60 seconds
Holdtime is 180 seconds
.....
```

T1

Dr. Ahmed ElShafee, ACU Spring 2014, Practical Applications in Computer Networks

SW02#config t

```
Enter configuration commands, one per line. End with CNTL/Z.
SW02(config)#interface Fas0/1
SW02(config-if)#no cdp enable
SW02(config-if)#end
```

SW02#show cdp

```
Global CDP information:
Sending CDP packets every 60 seconds
Sending a holdtime value of 180 seconds
Sending CDPv2 advertisements is enabled
SW02#show cdp interface
FastEthernet0/2 is up, line protocol is up
Sending CDP packets every 60 seconds
Holdtime is 180 seconds
FastEthernet0/3 is down, line protocol is down
Sending CDP packets every 60 seconds
Holdtime is 180 seconds
```

config t

```
interface range fa0/1 - 2 , fa0/5 , fa0/8
no cdp enable
end
```

T1

Dr. Ahmed ElShafee, ACU Spring 2014, Practical Applications in Computer Networks

SW02#show cdp neighbor

Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge
S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone

Device ID	Local Intrfce	Holdtime	Capability	Platform	Port ID
sw03	Fas 0/22	175	S	2950	Fas 0/22
sw01	Fas 0/21	175	S	2950	Fas 0/21
sw01	Fas 0/24	175	S	2950	Fas 0/24

SW02#show cdp entry sw01

Device ID: sw01
Entry address(es):
IP address : 10.0.10.2
Platform: cisco 2950, Capabilities: Switch
Interface: FastEthernet0/21, Port ID (outgoing port): FastEthernet0/21
Holdtime: 125

Version :

Cisco Internetwork Operating System Software
IOS (tm) C2950 Software (C2950-I6Q4L2-M), Version 12.1(22)EA4,
RELEASE SOFTWARE(fc1)
Copyright (c) 1986-2005 by cisco Systems, Inc.
Compiled Wed 18-May-05 22:31 by jhtariba

T*

Dr. Ahmed ElShafee, ACU Spring 2014, Practical Applications in Computer Networks

SW02(config)#no cdp run

SW02(config)#end

SW02#

%SYS-5-CONFIG_I: Configured from console by console

SW02#show cdp

% CDP is not enabled

SW02#

T†

Dr. Ahmed ElShafee, ACU Spring 2014, Practical Applications in Computer Networks

Thanks,..

See you next week (ISA),...

T*

Dr. Ahmed ElShafee, ACU Spring 2014, Practical Applications in Computer Networks